

## TP-Link MR200 Router


### Shipment Content:


- 1 x Protective Case
- 1 x 4G LTE Router
- 1 x Power Adapter
- 2 x Antennas





### Quick Setup:

1. **Install the antennas** and position them upwards.
2. **Plug in and turn On** the router. *Allow 3-5 minutes for the router to light up when ready.*

  
Power On

  
Internet On

  
Wireless On
3. **Connect your Wired devices.** (e.g. Ethernet enabled Printer) Connect the ethernet cable to a yellow port on the back of the router. Plug the other end of the cable into the printer. *The LAN LED  on the router lights up when connected.*




4. **Connect your Wireless devices** (e.g. Tablet / PC) Open the camera app on your device and scan the QR-Code on the bottom of the router. Alternatively use the default SSID (Wireless Network Name) on the bottom of the router along with the password in your *Important Documents Folder* to connect wirelessly.
5. **Via WPS** (e.g. WPS enabled Printer) Press *(do not hold)* the WPS button on the back of the router until the WiFi LED starts flashing. Then proceed to set the printer on WPS mode as per its setup guide. *Allow 1-2 minutes to establish a connection. Once the WiFi LED changes from flashing to solid a connection has been established.*

**Please DO NOT press the Reset button on the back of the router.**

### Troubleshooting:

What if...

... the router does not power up?	Please check if the power plugs are plugged in tightly. Switch On and Off again. <i>Wait 3 mins.</i>
... the WiFi symbol does not light up /the devices can't find WiFi to connect to?	Make sure, the WiFi function is switched On. Use the button on the back of the router.
...the Internet symbol does not light up?	Make sure to reach a signal strength of <b>3</b>  <b>to 4 bars</b> . Relocate the router closer to a window for better reception. <i>Wait 3 mins.</i>
...I want to change to a hardline connection?	Please ask for a DHCP activated hardline cable and plug it into the WAN/LAN port.
... I have to login to change the router setup?	Please turn around for more info.

### Setup Video Guide:

Scan this QR code with your phone camera for video.




### Contact our Support Team:

www.choose2rent.com/help  
 +1 (800) 622-6484 Ext. 3 (USA)  
 +49 40 226 360 - 590 (Europe)

## TP-Link MR200 Router


### How to login to the router?

1. Connect your tablet to the router WiFi.  
*If your router has been reset use default SSID and password from the bottom of the router.*
2. Then open the Safari browser and type '**tplinkmodem.net**' or the IP 192.168.0.1.
3. Type in '**admin**' as password.

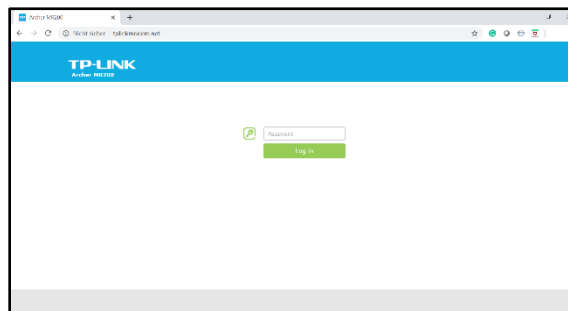

### How to enter a static IP address when using a static hardline from the venue?

1. Go to '**Advanced**' over the top navigation.
2. Then open **Network/Internet** and change the connection type to 'Static IP'.
3. **Enter the static IP** information here e.g. IP address, then press 'Save'.

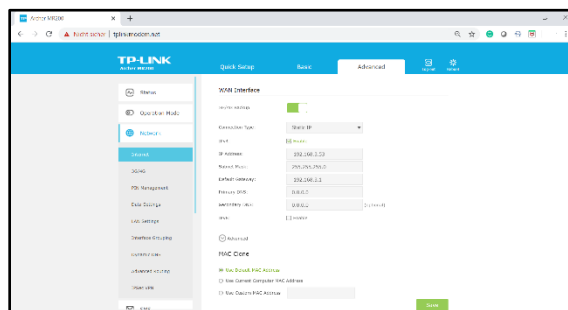


### How to setup a SIM card profile?


**Important: Only 4G/LTE SIM cards will work with this router.**


1. Activate and register your new SIM card on your providers website. If you need to see an SMS, this can be read under **SMS** in Advanced Mode.
2. Go to **Network/Internet** in Advanced Mode and enter the dial up settings from your SIM card provider.

*For most providers you can google this information e.g. 'dial-up Vodafone UK' or 'O2 apn setting UK'.*

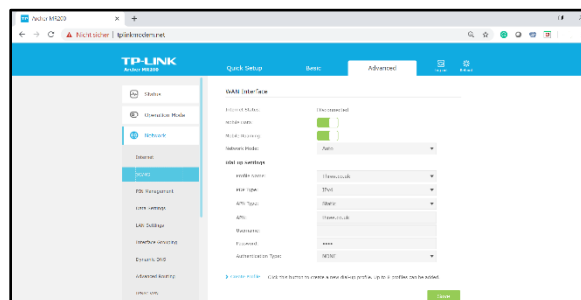

### How do I confirm a working internet connectivity?

1. The Internet LED on your router is lighted up. 
2. The **Network Map** in Basic Mode shows a tick and the status is 'connected'.
3. Your tablet opens web pages.

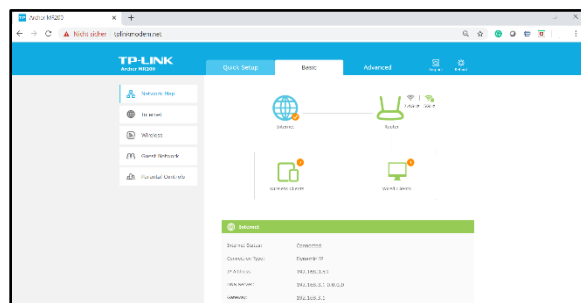

### Setup Video Guide:

Scan this QR code with your phone camera for video.



### Contact our Support Team:

[www.choose2rent.com/help](http://www.choose2rent.com/help)  
+1 (800) 622-6484 Ext. 3 (USA)  
+49 40 226 360 - 590 (Europe)